



Transformer Wheels

for Distribution Transformers in Accordance with EN 50216-4

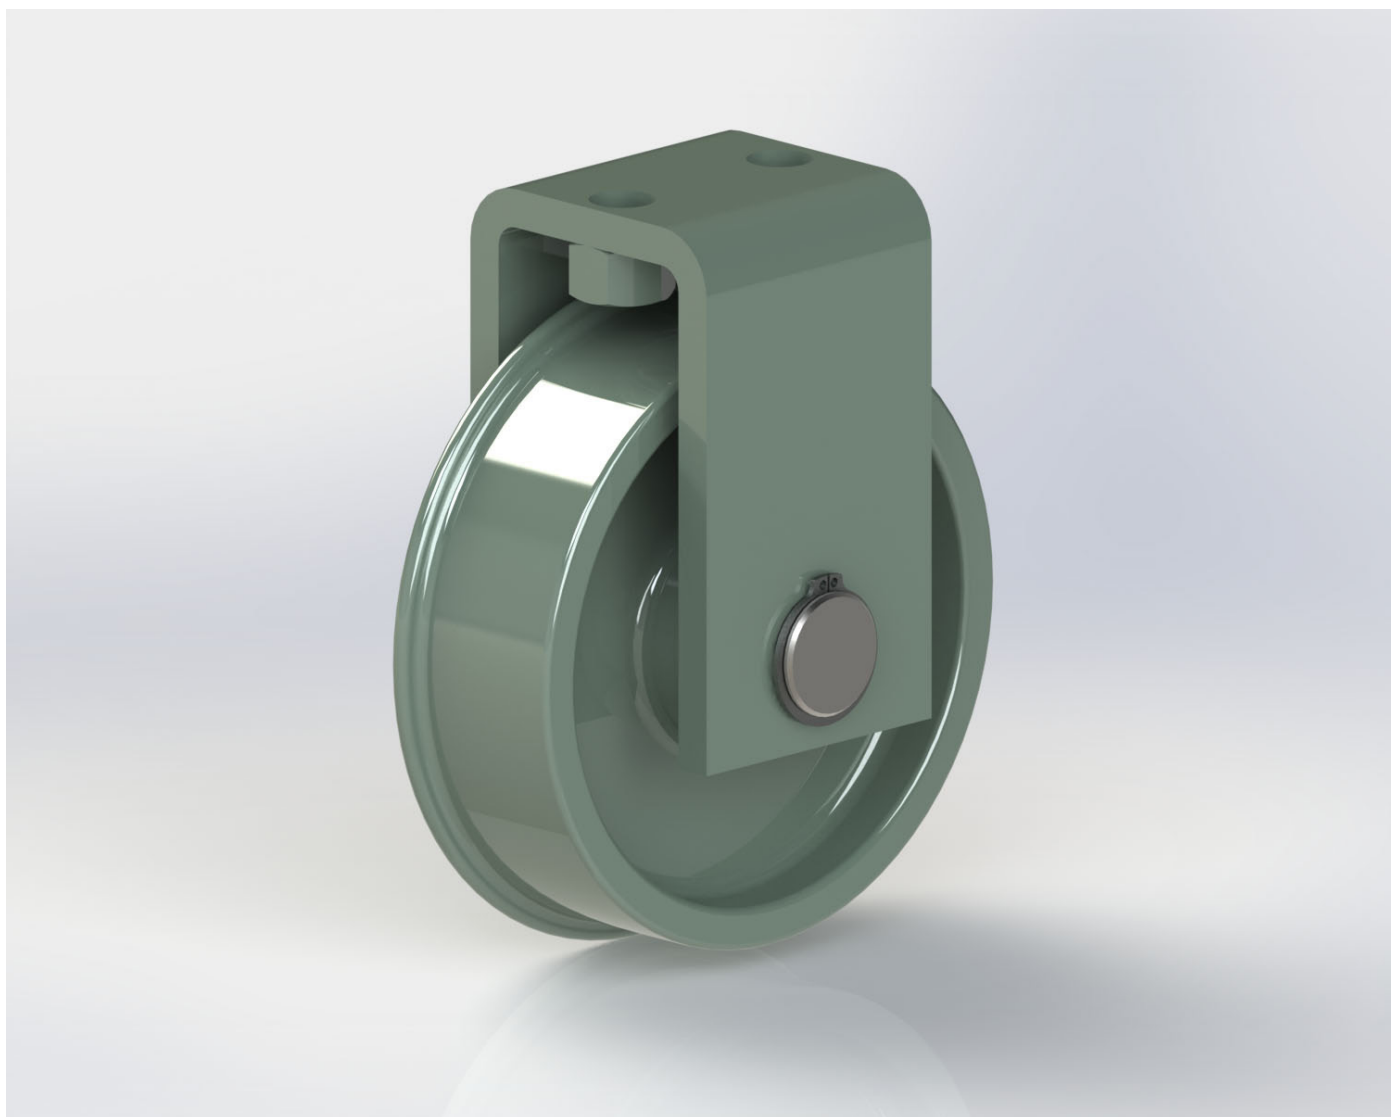


Transformer Wheels in Accordance with EN 50216-4

Type I / Connection with Nut and Pin

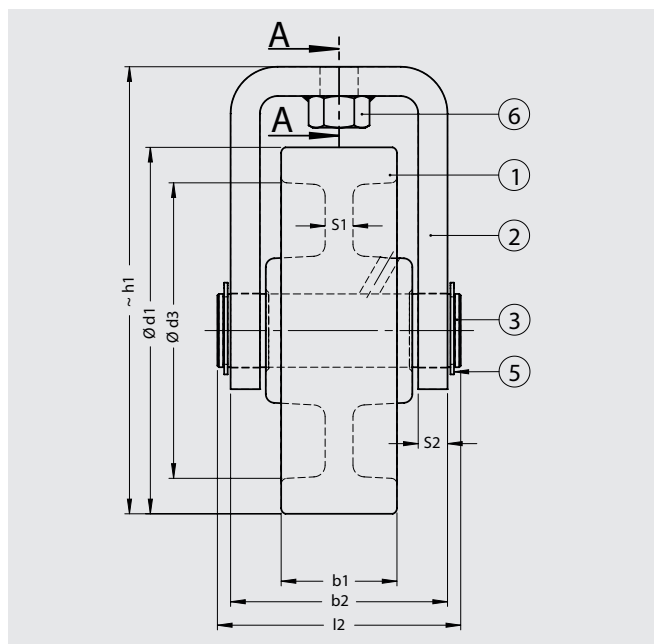

Connection Types (Section A - A)

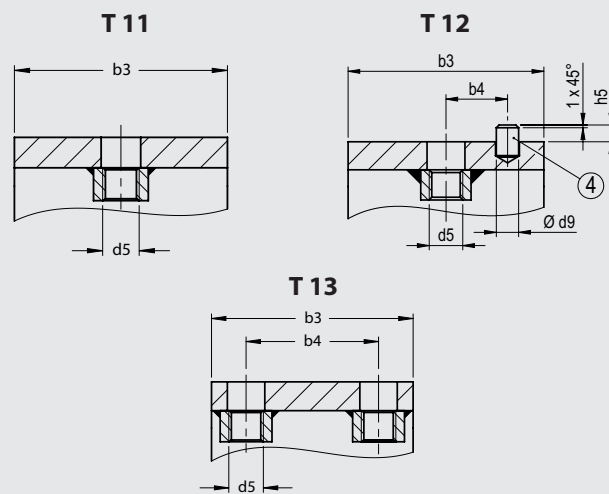

Pos.	Q'ty			Description	Remarks
	T11	T12	T13		
1	1	1	1	Wheel	EN-GJL-200
2	1	1	1	Wheel housing	S235JR (1.0037)
3	1	1	1	Axle	S235JR (1.0037)*
4	-	1	-	Dowel pin	S235JR (1.0037)
5	2	2	2	Retaining ring	DIN 471
6	1	1	2	Hex nut	DIN 934




DN d1	S2	b1	b2	b3	h1	l2	Connection Type	b4	d5	Ø d9	h5	Load Capacity Kg	Thick Type				Thin Type			
													Ø d3	S1	Kg	Code No.	Ø d3	S1	Kg	Code No.
125	6	40	66	60	152	75	T 11	-	M 12	-	-	1200	100	10	3,2	561 11110K	109	6	2,5	561 11110E
							T 12	22		8	6					561 11120K				561 11120E
							T 11	-		-	-					561 10110K				561 10110E
125	10	40	74	70	152	83	T 12	27	M 12	8	6	2500	100	10	3,9	561 10120K	109	6	3,2	561 10120E
							T 13	46		-	-					561 10130K				561 10130E
							T 11	-		-	-					561 20110K				561 20110E
160	10	50	84	80	195	95	T 12	27	M 16	13	4,5	3500	132	15	6,7	561 20120K	138	10	5,4	561 20120E
							T 13	56		-	-					561 20130K				561 20130E
							T 11	-		-	-					561 30110K				561 30110E
200	10	70	105	120	230	120	T 13	80	M 16	-	-	6000	160	17,5	15,7	561 30130K	175	12	12,9	561 30130E

Surface options: Zinc plating / hot dip galvanizing / wet or electrostatic powder painting (RAL 7032 / RAL 7033 / RAL 7035 / RAL 7038)

* upon request: X8CrNiS18-9 (1.4305) / AISI 303

Transformer Wheels in Accordance with EN 50216-4

Type II / Connection with Bolt Screw and Pin

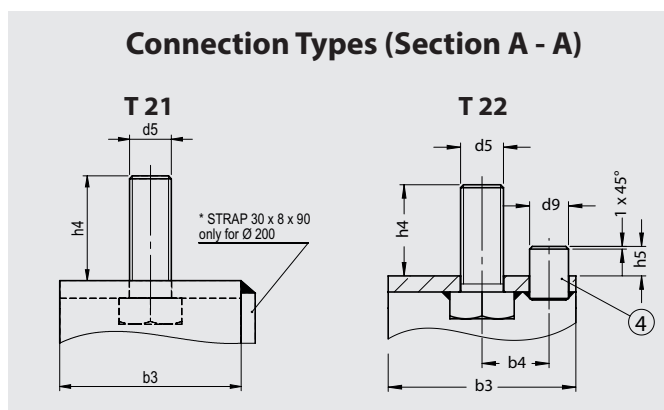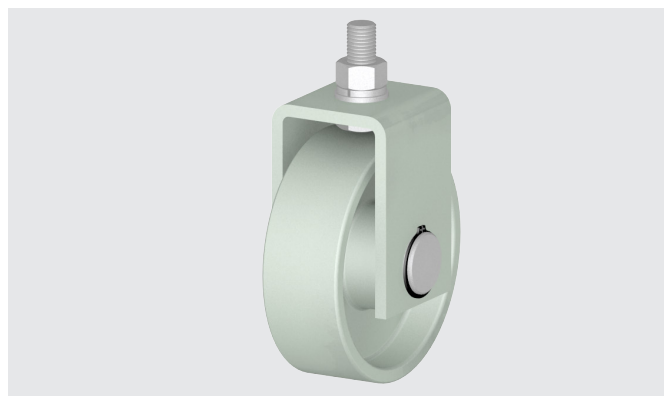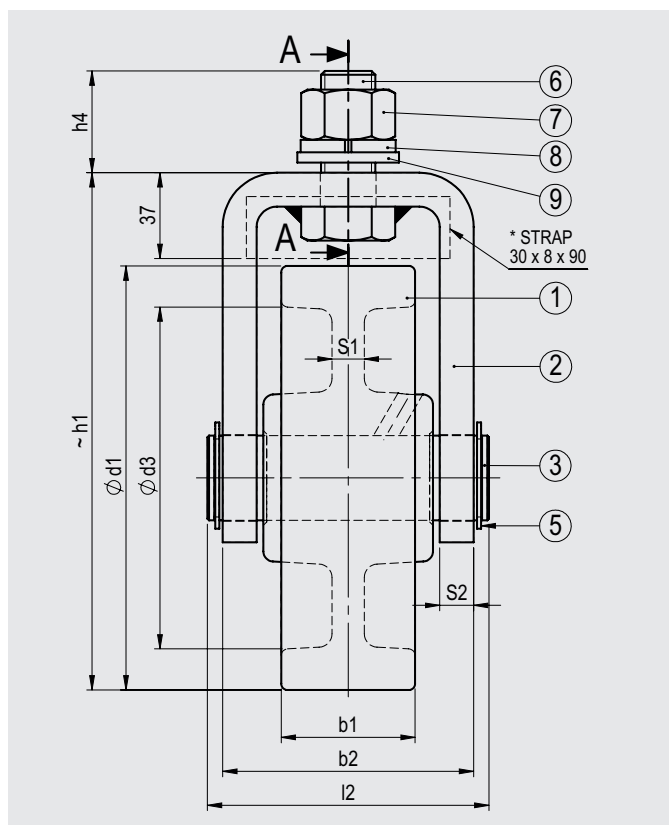

DN d1	S2	b1	b2	b3	h1	l2	Connection Type	b4	d5	Ø d9	h4	h5	Load Capacity Kg	Thin Type			
														Ø d3	S1	Weight Kg	Code No.
125	6	40	66	70	152	75	T 22	25	M 16 x 40	14,5	34	11	1200	109	6	2,6	M 561 12220E
125	10	40	74	70	152	83	T 21	-	M 16 x 35	-	30	-	1800	109	6	3,2	M 561 10210E
160	10	50	84	80	195	95	T 21	-	M 20 x 45	-	35	-	3500	138	10	6	M 561 20210E
200	10	70	105	104	230	120	T21	-	M 24 x 70	-	60	-	6000	175	12	13	M 561 31210E
							T21*										M 561 312110E

Pos.	Q'ty		Description	Remarks
	T21	T22		
1	1	1	Wheel	EN-GJL-200
2	1	1	Wheel housing	S235JR (1.0037)
3	1	1	Axle	S235JR (1.0037)*
4	-	1	Dowel pin	S235JR (1.0037)
5	2	2	Retaining ring	DIN 471
6	1	1	Bolt screw	DIN 933
7	1	1	Hex nut	DIN 934
8	1	1	Spring washer	DIN 127
9	1	1	Washer	DIN 125



Surface options:

- Zinc plating
- Hot dip galvanizing
- Wet or electrostatic powder paintin (RAL 7032 / RAL 7033 / RAL 7035 / RAL 7038)



* upon request: X8CrNiS18-9 (1.4305) / AISI 303

Transformer Wheels in Accordance with EN 50216-4

Type III / Rail Wheel Connection with Nut and Pin

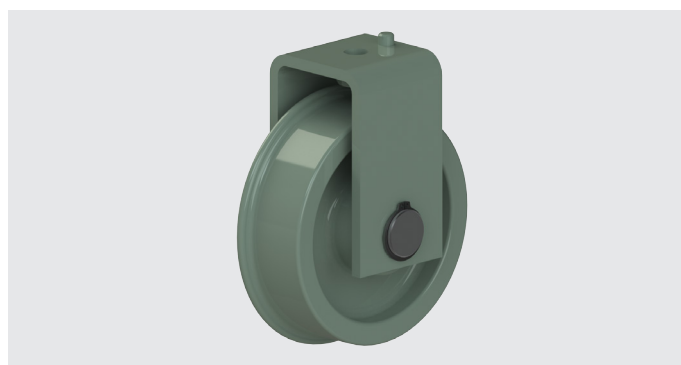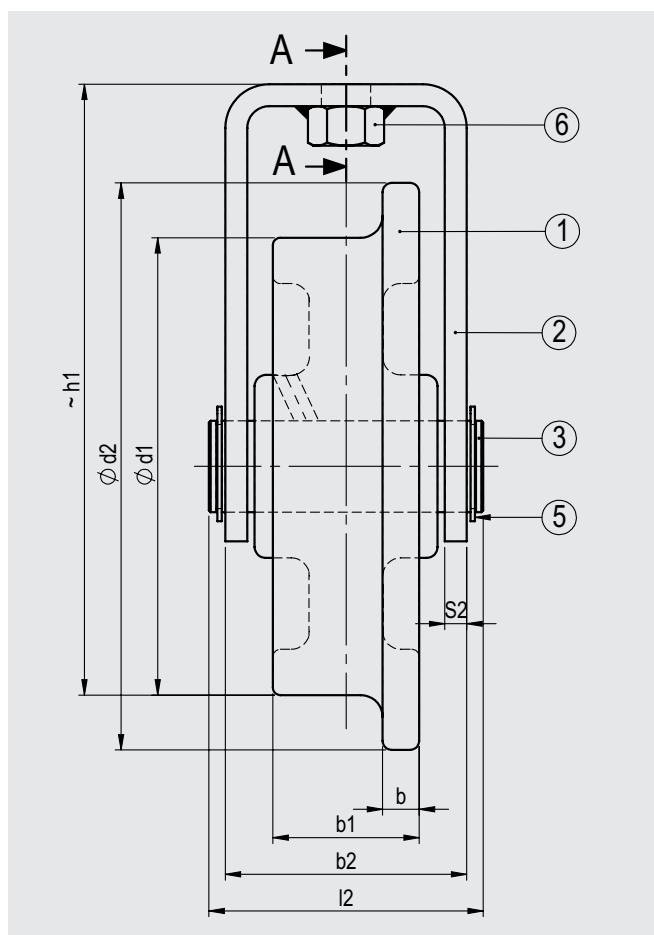

Connection Types (Section A - A)

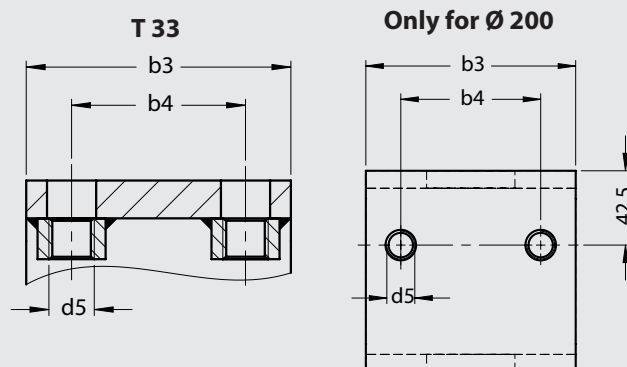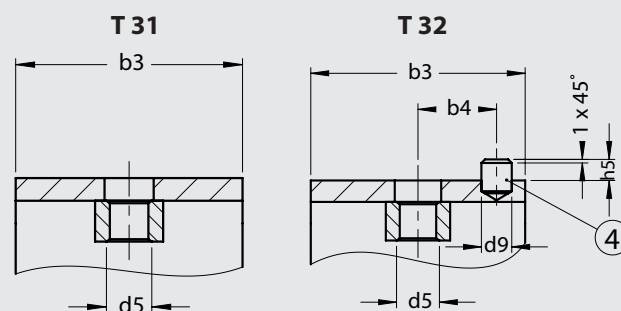

Pos.	Q'ty			Description	Remarks
	T 31	T 32	T 33		
1	1	1	1	Wheel	EN-GJL-200
2	1	1	1	Wheel housing	S235JR (1.0037)
3	1	1	1	Axle	S235JR (1.0037)*
4	-	1	-	Dowel pin	S235JR (1.0037)
5	2	2	2	Retaining ring	DIN 471
6	1	1	2	Hex nut	DIN 934



DN d1	Ø d2	b	b1	b2	b3	h1	l2	S2	Connection Type	b4	d5	Ø d9	h5	Weight Kg	Load Capacity Kg	Code No.
125	155	10	40	66	60	167	75	6	T 32	22	M 12	8	6	4,2	1200	561 R11320E
160	190	10	50	84	80	205	95	10	T 33	56	M 16	-	-	8,5	3500	561 R20330E
200	230	15	80	115	120	261	128	10	T 33	80	M 16	-	-	20,2	6000	561 R32330E

Surface options: Zinc plating / hot dip galvanizing / wet or electrostatic powder painting (RAL 7032 / RAL 7033 / RAL 7035 / RAL 7038)


* upon request: X8CrNiS18-9 (1.4305) / AISI 303

Transformer Wheels in Accordance with EN 50216-4

Type IV / Connection with Bolt Screw and Pin

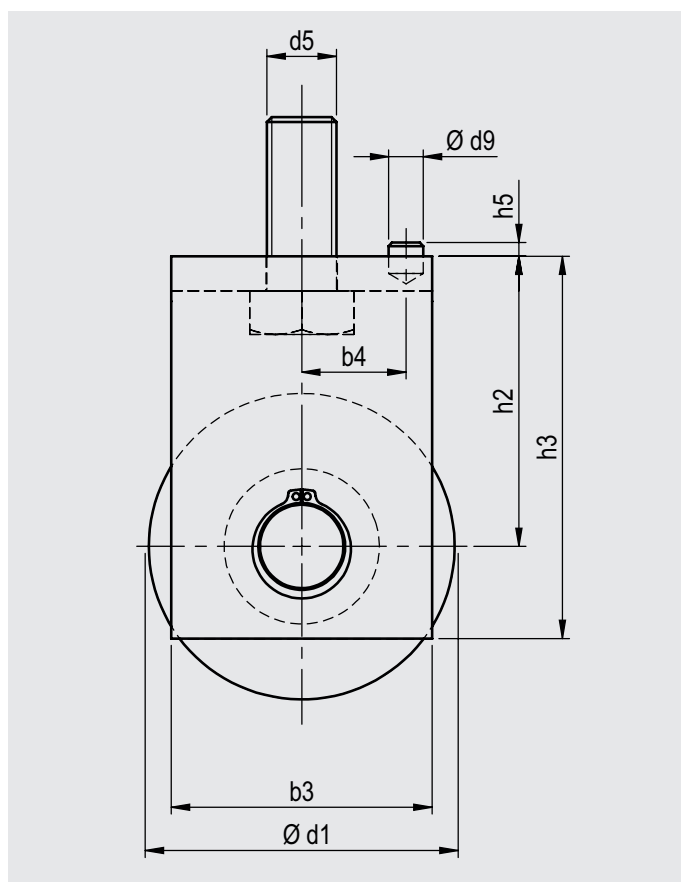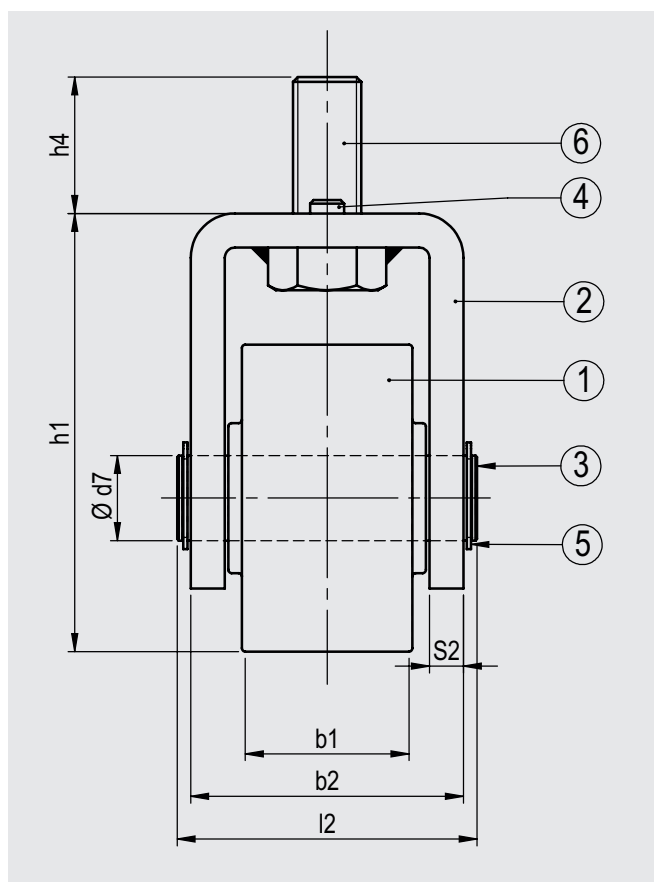

Pos.	Q'ty	Descriptions	Remarks
1	1	Wheel	S235JR (1.0037)
2	1	Wheel housing	S235JR (1.0037)
3	1	Axle	S235JR (1.0037)*
4	1	Dowel pin	S235JR (1.0037)
5	2	Retaining ring	DIN 471
6	1	Hex nut	DIN 933

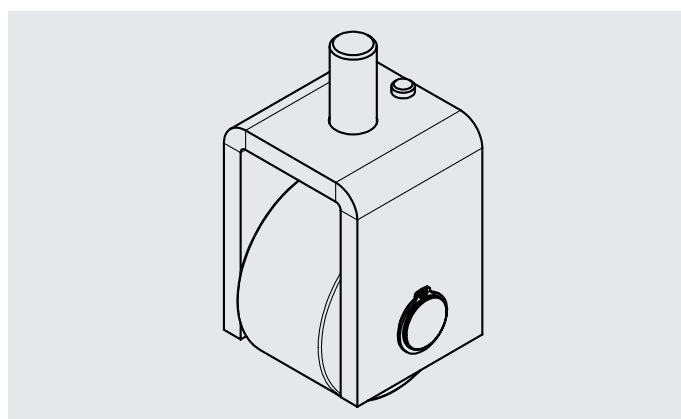

DN Ø d1	S2	b1	b2	b3	b4	d5	Ø d7	Ø d9	h1	h2	h3	h5	l2	Weight Kg	Code No.
50	5	22	29	38	15	M 10 x 50	10	6	65,5 - 66,75	40,5 - 41,75	52	3	46	0,6	561 504200
70	6	25	32	65	25	M 16 x 65	12	8	92,5 - 93,75	57,5 - 58,75	72	4	53	1,5	561 704200
80	10	32	41	75	30	M 20 x 75	16	10	112,5 - 113,75	72,5 - 58,75	93	4	69	2,9	561 804200
90	10	50	60	75	30	M 20 x 50	25	10	128,5 - 130	83,5 - 85	110	4	88	4,4	561 904200

Surface options: Zinc plating / hot dip galvanizing / wet or electrostatic powder painting (RAL 7032 / RAL 7033 / RAL 7035 / RAL 7038)

* upon request: X8CrNiS18-9 (1.4305) / AISI 303



Albert MAIER GmbH
Armaturen für Transformatoren
Industriestr. 19
71263 Weil der Stadt
Germany

Tel.: +49 70 33 53 76 30
Fax: +49 70 33 53 76 32
E-Mail: info@maier-armaturen.de

www.maier-armaturen.de